




PACPRO-100

The PACPRO-100 provides a versatile means of handling products of various sizes and shapes. Applications include: assembly lines, sorting, inspection, or simply transportation.



- Bolt together construction
- 3 1/2"x 12 Gauge galvanized frames
- Belt widths up to 36 inches

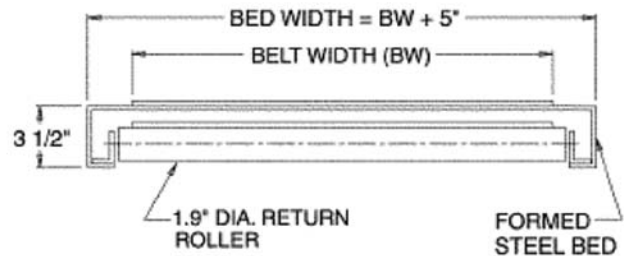

Belt - Black PVC-120 with clipper lacing.

Belt Widths - 12 in., 16 in., 18 in., 20 in., 24 in., 30 in. and 36 in.

Bed - 3 1/2 in. deep x 12 ga. galvanized steel slider bed. Standard 5 ft. and 10 ft. long bolt-together sections with bolt-on end couplers.

Floor Supports - Adjustable 33 7/8 in. to 38 1/8 in. top of belt. One support at every bed joint and at ends of conveyor.

Drive Pulley - 4 in. dia. with 1 3/16 in. dia. shaft or 8 in. dia. with 1 7/16 in. dia. shaft, crowned and fully lagged.

Tail Pulley - 4 in. dia. with 1 3/16 in. dia. shaft, crowned.

Snub Roller - 2 1/2 in. dia. galvanized with grease packed ball bearings (adjustable).

Return Rollers - 1.9 in. dia. galvanized with grease packed ball bearings.

Take-Up - Provides belt take-up at tail pulley to allow for future belt stretch.

Bearings - Sealed, pre-lubricated, self-aligning ball bearings on drive and tail pulleys.

Conveying Speed - Constant 60 FPM.

Speed Reduction - Sealed worm gear "C" face flanged speed reducer with No. 50 chain to drive pulley.

Motor - 1/2 HP - 230/460 V - 3 phase - 60 Hz. - totally enclosed, fan cooled.

Electrical Controls - Available as option.

Frame Capacity - Maximum load per linear foot with legs on 10 ft. centers = 100 lbs



Adjustable Supports



Adjustable Take-up



Chain Drive



Optional Controls

pacproinc
Packaging Progressions, Inc.

102 G.P. Clement Drive
Collegeville, PA 19426-0244
610-489-8601 Fax 610-489-8691

sales@pacproinc.com
www.pacproinc.com