

Your Solution for Low Cost Interleaving and Stacking

PPI-200-ES INTERLEAVER STACKER

FEATURES AND BENEFITS

- USDA approved
- Rugged stainless steel construction
- Fully automatic operation
- Control and drive enclosures are heated and fully gasketed
- PLC design allows easy production set-up, changes, and networking with other equipment
- Simple integration with stand alone stacking modules
- Easily interfaces with your sheeter, extruders, and cutters

UTILITIES

Electrical 120 VAC single phase, 15 amp
Pneumatic 80 PSI @ .5 CFM

PRODUCTION RATES

Up to 40 sheets per minute single lane
(product size dependent) Maximum length 16"

INTERLEAVING MATERIAL

Paper Uncoated, wet or dry waxed, silicone coated
Film High/low density poly
Rollstock Up to 18" dia. x 13" wide, a 3" dia. core




pacproinc

Packaging Progressions, Inc.

610-489-8601

Iron Bridge Corporate Center
102 G.P. Clement Drive
Collegeville, PA 19426-0244

fax 610-489-8691
sales@pacproinc.com
www.pacproinc.com

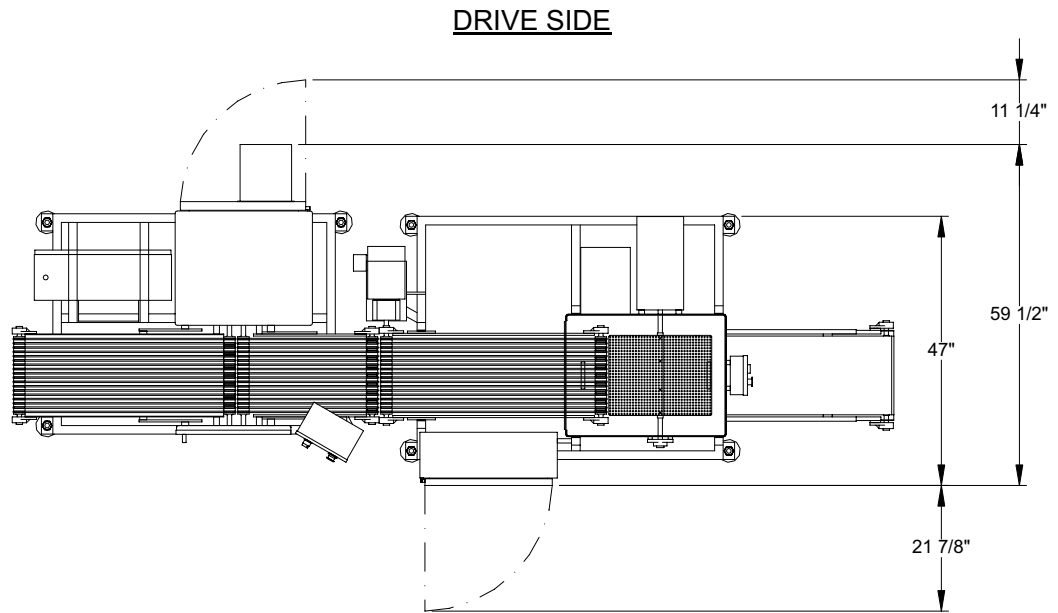

OPERATOR / AISLE SIDE



PRODUCT FLOW →

